



**IW-200 TCP**

ABS SURFACE MOUNTING CEILING LOUDSPEAKER



**ABS surface mounting ceiling loudspeaker**

- 2-way with 8" woofer and 1" dome tweeter
- Rated power 1/2/4/7.5/15/30W RMS
- 100V transformer
- Frequency response 40-20,000Hz, sensitivity @1W/1m of 90dB
- ABS base
- Dispersion (-6dB) 1kHz/4kHz 80°/140°

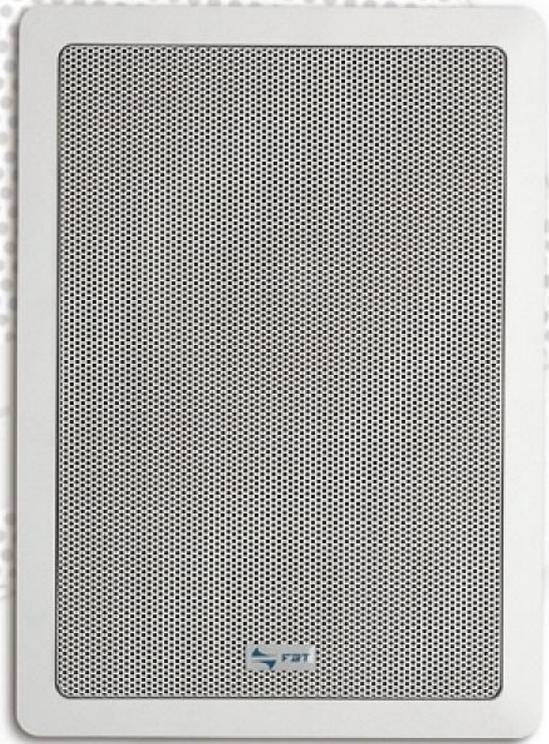

	<b>IW-200 TCP</b>
<b>Code</b>	<b>17862</b>
<b>Rated/Maximum power Loudspeaker</b>	2/4/7.5/15/30W RMS with transformer 100V with regulator 2-way coaxial, 8" woofer with 1" dome tweeter
<b>Frequency response</b>	40-20,000Hz
<b>Sensitivity 1W/1m</b>	90dB
<b>Maximum SPL 1m</b>	105dB
<b>Input voltage</b>	100V-70V
<b>Weight</b>	3 Kg
<b>Dimensions (WxHxD)</b>	257x360x109mm
<b>Cut-out diameter</b>	225x330mm
<b>Accessories</b>	surface mounting recess RB200

**RB-200**

**Surface mounting recess**

**Code 18160**  
Surface mounting recess for IW-200T  
loudspeakers