

PHM Series

Professional Installed Microphones



PHM series that Ideal for permanent fixture for conferences rooms, council chambers, courtrooms, and corporate boardrooms. It is miniature, phantom powered condenser microphone that offers the flexibility of a surface-mounted or boundary microphone of professional quality. Compact, lightweight, and easily flush-mounted on a sufficient sized hole drilled on a table, platform, pulpit, podium, wall or ceiling. It has a built-in circuitry in a tubular housing with XLR male connector for easy connection into a phantom power source.

PHM915



Installed Microphone

- Elements : Back Electret Condenser
- Polar Pattern : Cardioid
- Frequency : 50-18,000 Hz
- Sensitivity : $-67\text{dB} \pm 3\text{ dB}$
($0\text{dB}=1\text{ubar @1KHz}$)
- Impedance : $200\ \Omega \pm 30\%$ (@1KHz)
- Material : Copper
- Operating Voltage : 9V-52V DC
phantom power w/ built-in circuitry
- Connector : XLR(male)
- Dimension : $\phi 28 \times 88, 2\text{mm}$

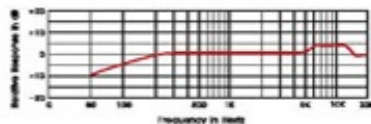

PHM916

Installed Microphone

- Elements : Back Electret Condenser
- Polar Pattern : Omnidirectional
- Frequency : 20-18,000 Hz
- Sensitivity : $-63\text{dB} \pm 3\text{ dB}$
($0\text{dB}=1\text{ubar @1KHz}$)
- Impedance : $250\ \Omega \pm 30\%$ (@1KHz)
- Material : Copper
- Operating Voltage : 9V-52V DC
phantom power w/ built-in circuitry
- Connector : XLR(male)
- Dimension : $\phi 28 \times 73\text{mm}$

