

MM-202C Gooseneck Microphone

Key Features



- Ultra slim profile design for podiums, pulpit and lectern applications.
- Proprietary microphone mount design allows 110° up/down and 300° left/right angle adjustments.
- Shock isolation mount design minimizes handling and vibration noise.
- Multi-layered microphone grill minimizes pop noise.
- Can be connected to MJ-53 Condenser Microphone Adaptor and provides with 48V phantom power and used as a desktop gooseneck microphone.
- Unmatched high fidelity sound reproduction.

Compatible Products

ACT-T series	Fits all ACT-T series bodypack transmitters
ACT-TC series	Fits all ACT-TC series rechargeable bodypack transmitters
BC-100	Wireless Boundary Microphone
BC-100T	Rechargeable Wired / Wireless Conference Microphone
BC-100DT	Digital Rechargeable Wired / Wireless Conference Microphone
MD-101	Bodypack Transmitter Holder Base
MJ-53	Condenser Microphone Adaptor

Technical Specifications

Capsule Module	10 mm Ø uni-directional condenser microphone
Frequency Response	50 Hz – 18 kHz
Sensitivity	-46 dBV ± 3 dBV / Pa (0 dB = 1 V / Pa)
Maximum SPL	142 dB (typical, 1% T.H.D.)
Plug	TA4F 4-pin connector
Length	600 mm / 23.6 "
Color	Black
Weight	Approx. 38 g / 1.3 oz

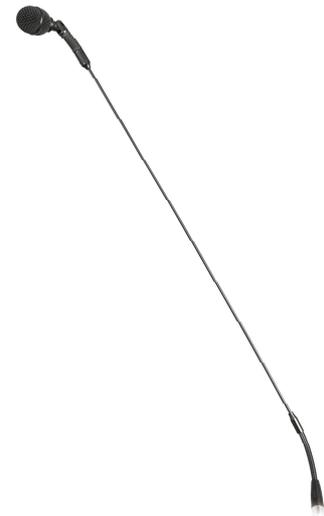

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw